


DME&JDE PVC High Pressure Layflat Hose

Super Light Duty (2/3 Bar)

Features

- Used for agriculture.
- Made from high strength polyester and high quality PVC, once-molded by extruder plastic.
- Anti-aging, no smelling, long life.
- Lighter weight, easy to handle and store.
- Anti-UV, temperature resistance, anti-chemical and flexible.

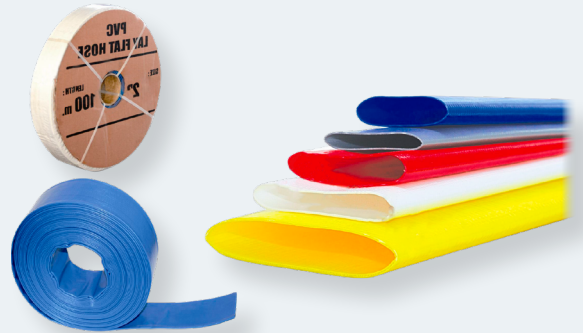

Specifications

Specification of PVC High Pressure Layflat Hose (Super Light Duty)

| Size | | Length | MAX.W.P | MAX.B.P | Weight |
|-----------|-------------|--------|----------|---------|--------|
| Inch Size | Metric Size | | At 23 °C | | |
| INCH | mm | M/ROLL | Bar | Bar | g/m |
| 2" | 51 | 100 | 2 | 8 | 190 |
| 3" | 76 | 100 | 2 | 8 | 280 |
| 4" | 103 | 100 | 2 | 8 | 430 |

DME&JDE PVC High Pressure Layflat Hose

Light Duty (4 Bar)

Features

- Irrigation in agriculture and transfer liquid in industry.
- Once-molded by extruder plastic .Small thickness,light weight,high pressure resistance.
- Anti-chemical, anti-aging.
- Environmental grade hose can meet REACH standard.
- Suitable for drip irrigation system.
- Anti-UV, temperature resistance and flexible.



Specifications

Specification of PVC High Pressure Layflat Hose (Light Duty)

| Inch Size | Metric Size | | Length | MAX.W.P | MAX.B.P | Weight |
|-----------|-------------|----------------|--------|----------|---------|--------|
| | I.D. | Wall Thickness | | At 23 °C | | |
| INCH | I.D. mm | mm | M/ROLL | Bar | Bar | g/m |
| 1" | 25 | 1.3 | 100 | 4 | 15 | 150 |
| 1-1/4" | 32 | 1.2 | 100 | 4 | 15 | 170 |
| 1-1/2" | 38 | 1.2 | 100 | 4 | 15 | 190 |
| 2" | 51 | 1 | 100 | 4 | 12 | 220 |
| 2.5" | 64 | 1.1 | 100 | 4 | 12 | 300 |
| 3" | 76 | 1.1 | 100 | 4 | 12 | 360 |
| 4" | 103 | 1.25 | 100 | 4 | 12 | 550 |
| 5" | 127 | 1.35 | 100 | 3.5 | 10 | 750 |
| 6" | 153 | 1.35 | 100 | 3 | 9 | 900 |
| 8" | 203 | 2 | 100 | 3 | 9 | 1600 |
| 10" | 255 | 2.4 | 100 | 2.5 | 7 | 2600 |
| 12" | 305 | 2.35 | 100 | 2 | 6 | 3000 |
| 14" | 358 | 3 | 50 | 2 | 6 | 5000 |
| 16" | 408 | 3 | 50 | 2 | 6 | 6000 |

DME&JDE PVC High Pressure Layflat Hose

Medium Duty (6 Bar)

Features

- Use for irrigation in agriculture and transfer liquid in industry.
- Higher pressure resistance.
- Good abrasion resistance.
- Environmental grade hose can meet REACH standard.
- Suitable for drip irrigation system.
- Anti-UV, temperature resistance, anti-chemical and flexible.



Specifications

Specification of PVC High Pressure Layflat Hose (Medium Duty)

| Inch Size | Metric Size | | Length | MAX.W.P | MAX.B.P | Weight |
|-----------|-------------|----------------|--------|----------|---------|--------|
| | I.D. | Wall Thickness | | At 23 °C | | |
| INCH | I.D. mm | mm | M/ROLL | Bar | Bar | g/m |
| 3/4" | 20 | 1.35 | 100 | 6 | 21 | 110 |
| 1" | 25 | 1.3 | 100 | 6 | 21 | 160 |
| 1-1/4" | 32 | 1.2 | 100 | 6 | 21 | 190 |
| 1-1/2" | 38 | 1.2 | 100 | 6 | 21 | 220 |
| 1-1/2" | 40 | 1.4 | 100 | 6 | 18 | 225 |
| 2" | 51 | 1.35 | 100 | 6 | 18 | 300 |
| 2.5" | 64 | 1.55 | 100 | 6 | 18 | 430 |
| 3" | 76 | 1.5 | 100 | 6 | 18 | 500 |
| 4" | 103 | 1.9 | 100 | 6 | 18 | 800 |
| 5" | 127 | 2 | 100 | 6 | 18 | 1080 |
| 6" | 153 | 2.4 | 100 | 6 | 18 | 1600 |
| 8" | 203 | 2.6 | 100 | 5 | 15 | 2200 |

DME&JDE PVC High Pressure Layflat Hose

Heavy Duty (8/10 Bar)

Features

- Discharge sludge in agriculture, construction, industry, mining and marine service, etc.
- Reinforced with specialized industrial polyester yarn, high pressure resistance.
- Suitable for drip irrigation system.
- Anti-UV.



Specifications

Specification of PVC High Pressure Layflat Hose (Heavy Duty)

| Inch Size | Metric Size | | Length | MAX.W.P | MAX.B.P | Weight |
|-----------|-------------|----------------|--------|----------|---------|--------|
| | I.D. | Wall Thickness | | At 23 °C | | |
| INCH | I.D. mm | mm | M/ROLL | Bar | Bar | g/m |
| 3/4" | 20 | 1.55 | 50 | 10 | 30 | 140 |
| 1" | 25 | 1.8 | 50 | 10 | 30 | 200 |
| 1-1/4" | 32 | 1.5 | 50 | 10 | 30 | 210 |
| 1-1/2" | 38 | 1.7 | 50 | 10 | 30 | 290 |
| 1-1/2" | 40 | 1.9 | 50 | 10 | 30 | 300 |
| 1-4/3" | 45 | 2 | 50 | 10 | 30 | 350 |
| 2" | 51 | 1.55 | 50 | 8 | 24 | 350 |
| 2" | 51 | 1.8 | 50 | 10 | 30 | 420 |
| 2.5" | 64 | 1.9 | 50 | 10 | 30 | 700 |
| 3" | 76 | 2 | 50 | 8 | 24 | 660 |
| 3" | 76 | 2.55 | 50 | 10 | 30 | 850 |
| 4" | 103 | 2.55 | 50 | 8 | 24 | 1000 |
| 4" | 103 | 2.7 | 50 | 10 | 30 | 1200 |
| 6" | 153 | 3 | 50 | 8 | 24 | 2000 |
| 8" | 203 | 3.2 | 50 | 6 | 18 | 2800 |