


DME&JDE F-Type

Features

- Smooth inner and outer surface.
- Extensively used in industry and agriculture for pumping and transferring needs.
- Suitable for conveying liquid, powder.
- Excellent corrosion-proof protection for cable conduit and piping.
- Excellent flexibility, light weight and small bending radius.

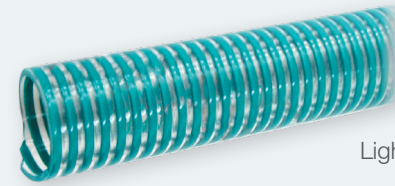

Light Duty



Heavy Duty



Specifications

— Specification of PVC Suction Hose F-Type (Light Duty) —

Inch Size	Metric Size		Length	MAX.W.P	MAX.B.P	Weight
				At 23 °C		
inch	I.D. mm	O.D. mm	m/roll	Bar	Bar	g/m
3/4"	19	23	30	6	18	230
1"	25	29	30	6	18	290
1-1/4"	32	36	30	6	18	350
1-1/4"	32	38	30	6	18	400
1-1/2"	38	44	30	6	18	550
1-1/2"	38	46	30	6	18	650
2"	50	54	30	5	15	550
2"	50	56	30	5	15	700
2-1/2"	63	69	30	4	12	880
2-1/2"	63	71	30	4	12	1170
3"	75	81	30	3	9	1160
3"	75	83	30	3	9	1300
4"	100	108	30	3	9	1950
4"	100	110	30	3	9	2300
5"	125	135	20	3	9	3000
5"	125	137	20	3	9	3300
6"	152	164	10	2	6	4500
6"	152	166	10	2	6	5500
8"	200	214	10	2	6	6300

— Specification of PVC Suction Hose F-Type (Heavy Duty) —

Inch Size	Metric Size		Length	MAX.W.P	MAX.B.P	Weight
				At 23 °C		
inch	I.D. mm	O.D. mm	m/roll	Bar	Bar	g/m
3/4"	19	25	30	8	24	280
1"	25	31	30	8	24	350
1-1/4"	32	40	30	8	24	500
1-1/2"	38	48	30	8	24	750
2"	50	58	30	7	21	920
2"	50	60	30	7	21	1050
2-1/2"	63	73	30	6	18	1300
3"	75	85	30	5	15	1650
3"	75	87	30	5	15	1900
4"	100	112	30	5	15	2900
4"	100	114	30	5	15	3200
4"	100	116	30	6	18	3700
5"	125	139	20	4	12	3600
5"	125	141	20	4	12	4000
6"	152	170	10	4	12	7200
6"	152	174	10	5	15	8000
8"	200	216	10	3	9	6700