


# DME&JDE Plastic Spiral Warp Protector – Cambered Surface

DME&JDE **cambered surface plastic spiral warp protector**, as its name implies, is a kind of spiral hose guard with a cambered surface and the edge thickness is thinner than that of the center. When the cambered surface and the flat surface plastic spiral warp protector have the same inner diameter, their center thickness is also the same. If you do not want your hose to add more weight, you may choose cambered surface plastic spiral warp protector.



## Material & Features & Benefits

- Polypropylene (PP).
- Exceptional anti-crushing performance. [ AS 1145: Test passed ].
- High abrasion resistance. [ ISO 6954: Test passed ].
- Long life & Good resistance to UV rays. [ ISO 4892-2:Test passed ].
- Fire Resistance / Flame retardant [ ISO 1210: Test passed ].
- Easy to fit.

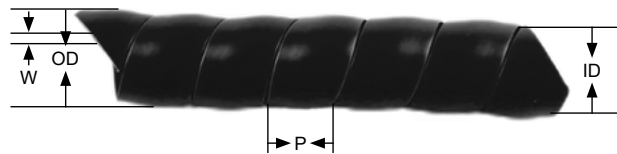

## Specification

Specification of Cambered Surface Plastic Spiral Warp Protector						
Type (mm)	I.D. (mm)	O.D. (mm)	W (mm)	P (mm)	Recommended Hose Range (mm)	Length (m/roll)
D&J-HDPE-2-8	8.0	11.0	1.5	10.0	8/12	2/20/50/100/200
D&J-HDPE-2-10	10.0	12.8	1.4	11.0	10/14	2/20/50/100/200
D&J-HDPE-2-12	12.0	15.0	1.5	12.0	12/16	2/20/50/100/200
D&J-HDPE-2-14	14.0	17.0	1.5	13.0	14-18	2/20/50/100/200
D&J-HDPE-2-16	16.0	19.6	1.8	15.0	16-20	2/20/50/100/200
D&J-HDPE-2-18	18.0	21.6	1.8	16.0	18-22	2/20/50/100
D&J-HDPE-2-20	20.0	24.0	2.0	18.0	20-24	2/20/50/100
D&J-HDPE-2-21	21.0	25.0	2.0	18.0	21-25	2/20/50/100
D&J-HDPE-2-22	22.0	26.0	2.0	18.0	22-25	2/20/50/100
D&J-HDPE-2-23	23.0	27.0	2.0	19.2	23-28	2/20/50/100/150
D&J-HDPE-2-24	24.0	28.0	2.0	21.0	24-28	2/20/50/100/150
D&J-HDPE-2-25	25.0	29.8	2.4	21.5	25-30	2/20/50/100/150
D&J-HDPE-2-28	28.0	33.2	2.6	23.0	28-32	2/20/50/100/150
D&J-HDPE-2-30	30.0	34.8	2.4	22.5	30-35	2/20/50/100
D&J-HDPE-2-32	32.0	37.6	2.8	23.0	32-38	2/20/50/100
D&J-HDPE-2-35	35.0	40.6	2.8	24.0	35-40	2/20/50/100
D&J-HDPE-2-38	38.0	44.0	3.0	25.0	38-43	2/20/50/100
D&J-HDPE-2-40	40.0	47.0	3.5	27.0	40-45	2/20/50
D&J-HDPE-2-42	42.0	49.0	3.5	25.0	42-48	2/20/50
D&J-HDPE-2-45	45.0	53.0	4.0	28.0	45-50	2/20/50
D&J-HDPE-2-48	48.0	56.0	4.0	28.0	48-52	2/20/50
D&J-HDPE-2-50	50.0	59.0	4.5	29.0	50-55	2/20/50
D&J-HDPE-2-52	52.0	61.0	4.5	29.0	52-58	2/20/50
D&J-HDPE-2-55	55.0	64.0	4.5	30.0	55-60	2/20/50
D&J-HDPE-2-60	60.0	69.0	4.5	30.0	60-65	2/20/50
D&J-HDPE-2-63	63.0	72.0	4.5	30.0	63-68	2/20/50
D&J-HDPE-2-65	65.0	74.0	4.5	30.0	65-70	2/20/50
D&J-HDPE-2-67	67.0	76.0	4.5	30.0	67-72	2/10/20
D&J-HDPE-2-70	70.0	79.0	4.5	34.0	70-75	2/10/20
D&J-HDPE-2-74	74.0	84.0	5.0	34.0	74-80	2/10
D&J-HDPE-2-75	75.0	85.0	5.0	42.0	75-78	2/10
D&J-HDPE-2-80	80.0	91.0	5.5	45.0	80-85	2/10
D&J-HDPE-2-88	88.0	99.0	5.5	45.0	88-95	2/10
D&J-HDPE-2-90	90.0	101.0	5.5	45.0	90-97	2/10
D&J-HDPE-2-100	100.0	112.0	6.0	50.0	100-110	2/10
D&J-HDPE-2-150	150.0	162.0	6.0	38.0	150-180	2
D&J-HDPE-2-200	200.0	210.0	5.0	50.0	200-300	2