

DME&JDE GROUP
YOUR CONNECTORS & HOSES OEM SOLUTIONS



France Technology Equipment

DME&JDE



HOSE CRIMPER MACHINE

Hose-Crimper 32-Pro



TECH Powered by:

SIEMENS

Schneider
Electric




Web: www.dmejde.com
E-Mail: info@dmejde.com



Tel: +86-318-6662021
Mobile: +86-19133858816 (WhatsApp & WeChat)

HOSE-CRIMPER

DME&JDE Hose-Crimper 32-Pro

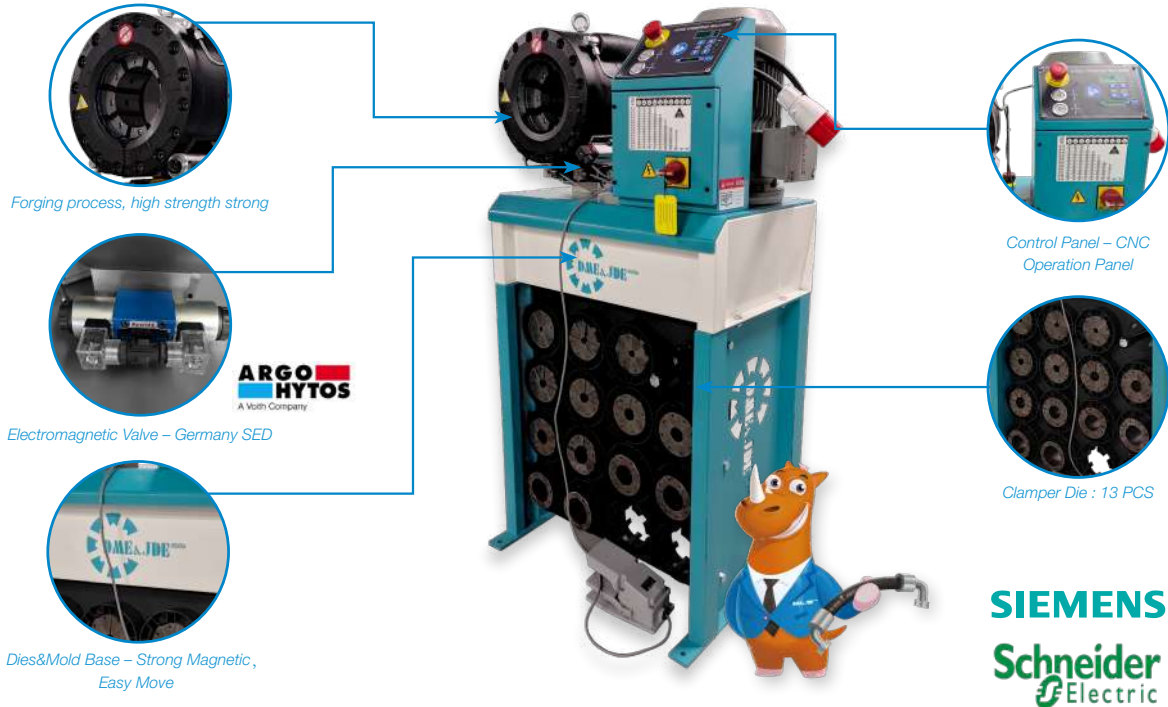

Specification

► Technical Data

Crimp head material	High strength forge steel © "German Industry 4.0"		
Crimping Diameter Range	10mm-87mm (*Special sizes can be customized)		
Capacity of Crimper	1. Standard Crimper Size:14mm-75mm (*Four steel wires spirial 4SH 2") 2. Use a Additional purchase of Die Size:10mm-87mm (*Six steel wires spirial R15 2")		
Max Opening	33 mm		
Max opening without dies	33 mm + 99 mm = 132 mm		
Pump flow rate	12 L/min	Max Pressure	275 bar
Crimping Force	2000 kN	Motor power	4000 W
Theoretical Production Capacity	850 times per hour	Speed of Master Dies Closing/open	2.7 mm/s
Sound Pressure Level	71 dB(A) [Reference target: ISO 45001]	Oil tank volume	55 L
Oil quantity/ type	50 L Recommended : Winter: YB-N32 [HM 32] Summer: YB-N46 [HM46]	Enclosure Class	IP 54
Weight	260 kg (Excluding Oil)	Size: Length * width * height	710 * 500 * 1350 mm
Foot pedal / switch	Included [Reference target: ISO 45001]		

► High Pressure Dies Specification [The standard configuration is 13 sets of DIE]

Number	Die No.	Crimp Range (mm)	D (mm)	L (mm)
1	Die#/10	10-12 [Additional purchase]	10	55
2	Die#/12	12-14 [Additional purchase]	12	55
3	Die#/14	14-16	14	55
4	Die#/16	16-19	16	55
5	Die#/19	19-22	19	55
6	Die#/22	22-26	22	70
7	Die#/26	26-30	26	70
8	Die#/30	30-34	30	70
9	Die#/34	34-39	34	75

Number	Die No.	Crimp Range (mm)	D (mm)	L (mm)
10	Die#/39	39-45	39	75
11	Die#/45	45-51	45	90
12	Die#/51	51-57	51	90
13	Die#/57	57-63	57	100
14	Die#/63	63-69	63	110
15	Die#/69	69-75	69	110
16	Die#/74	74-80 [Additional purchase]	74	110
17	Die#/78	78-87 [Additional purchase]	78	110

Notes: Use only original DME&JDE-Power die sets in DME&JDE-Power crimping machines.

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

HOSE-CRIMPER

DME&JDE Hose-Crimper 32-Pro

High pressure crimper dies type List :

NO.DME&JDE-CR-Dies-01



*Crimper Dies Type
Standard Crimper Dies*

NO.DME&JDE-CR-Dies-02



*Crimper Dies Type
Marking / Embossed Crimper Dies*

NO.DME&JDE-CR-Dies-03



Crimper Dies Type One Bubble Crimping Dies

NO.DME&JDE-CR-Dies-04



*Crimper Dies Type
Two Bubble Crimping Dies*

NO.DME&JDE-CR-Dies-05




*Crimper Dies Type
Hexagonal Crimping Scheme (Popular)*

Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

HOSE-CRIMPER

DME&JDE Hose-Crimper 32-Pro

NO.DME&JDE-CR-Dies-06

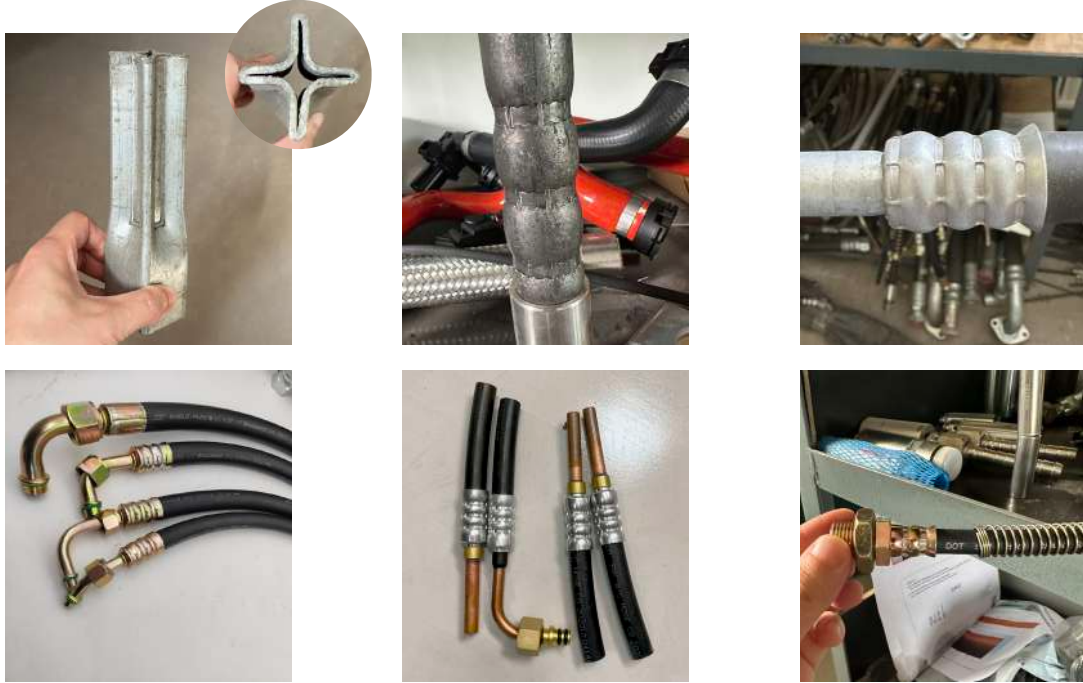

Crimper Dies Type Customized OEM Solution (some pictures)

Equipment production capacity

With years of experience, DME&JDE is always developing and continuing to grow. Visit the company and the workshop to learn more about the spirit, culture and strength of DME&JDE. Advanced equipment and strict working principles ensure that hydraulic hoses, hydraulic fluid connector fittings and hose assemblies meet or exceed international standards.



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com

HOSE-CRIMPER

DME&JDE Hose-Crimper 32-Pro

Equipment quality control, packaging and warehousing

Strict quality control systems ensure that products are qualified and even exceed industry standards to reduce defect rates, reduce downtime, and improve equipment performance. The standard packing guarantees the perfect condition of the product. Customized packaging provides more possibilities to meet the requirements of different agents and customers, eliminating worries.



Web: <https://www.dmejde.com>
E-mail: info@dmejde.com



DME & JDE GROUP
YOUR CONNECTORS & HOSES OEM SOLUTIONS



Web: www.dmejde.com
E-Mail: info@dmejde.com



Tel: +86-318-6662021
Mobile: +86-19133858816 (WhatsApp & WeChat)