


DME&JDE PVC Steel Wire Reinforced Hose Heavy Duty

Features

- Used for drawing and conveying water, oil and powder in factory and agriculture.
- Suitable for high strength working environment like suction and discharge for sand.
- Good adaptability to hard weather condition and minus pressure, small bending radius, anti abrasion.
- Passed the ROHS, PAHS test.
- Anti-UV.

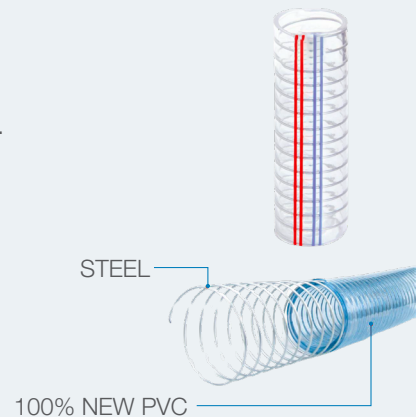

Specifications

Specification of PVC Steel Wire Reinforced Hose Heavy Duty

Inch Size	Metric Size		Length	MAX.W.P	MAX.B.P	Weight	Inch Size	Metric Size		Length	MAX.W.P	MAX.B.P	Weight
				At 23 °C							At 23 °C		
INCH	I.D. mm	O.D. mm	M/ROLL	Bar	Bar	g/m	INCH	I.D. mm	O.D. mm	M/ROLL	Bar	Bar	g/m
1/4"	6	11	100	8	24	115	2-5/16"	58	69	40	4	12	1600
5-16"	8	14	100	8	24	150	2-1/2"	64	78	30	4	12	2500
3/8"	9	15	100	8	24	170	3"	76	90	30	4	12	3000
3/8"	10	16	100	8	24	200	3-1/2"	90	108	20	4	12	4500
1/2"	12	18	100	8	24	220	4"	102	116	20	4	12	4300
5/8"	15	22	50	6	18	300	4-3/8"	110	123	20	3	9	4000
3/4"	19	26	50	6	18	360	4-5/8"	117	133	10	3	9	5500
3/4"	20	26	50	6	18	320	5"	127	143	10	3	9	6000
7/8"	22	27	50	6	18	300	5-1/2"	140	156	10	3	9	6500
1"	25	33	50	5	16	540	6"	152	170	10	2	6	8500
1-1/4"	32	40	50	5	16	700	6-5/16"	160	176	10	2	6	8500
1-1/2"	38	48	50	5	15	1000	7"	180	196	10	2	6	8500
1-3/4"	45	56	50	5	15	1300	8"	200	224	10	2	6	12000
1-7/8"	48	59	50	5	15	1400	10"	254	286	10	2	6	20000
2"	50	62	50	5	15	1600							