


# DME&JDE PVC Steel Wire Reinforced Hose Light Duty

## Features

- Used for drawing and conveying water, oil and powder in factory, agriculture.
- Spiral steel wire reinforced incorporated within the wall of flexible PVC tubing.
- Suitable for usual pressure environment.
- High-quality, low price, higher cost performance.
- Anti-UV, smooth surface, temperature resistance, anti-abrasion and anti-chemical.

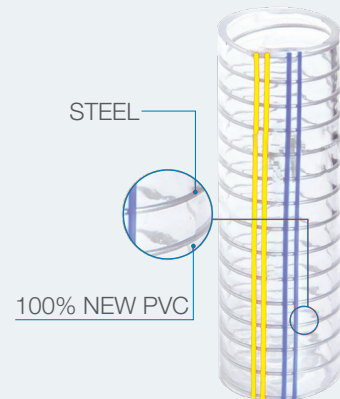

## Specifications

Specification of PVC Steel Wire Reinforced Hose Light Duty

Inch Size	Metric Size		Length	MAX.W.P	MAX.B.P	Weight	Inch Size	Metric Size		Length	MAX.W.P	MAX.B.P	Weight
	I.D. mm	O.D. mm		At 23 °C				I.D. mm	O.D. mm		At 23 °C		
inch	I.D. mm	O.D. mm	m/roll	Bar	Bar	g/m	inch	I.D. mm	O.D. mm	m/roll	Bar	Bar	g/m
3/8"	9	14	100	6	18	150	1-3/4"	45	52	50	3	9	800
3/8"	10	15	100	6	18	160	1-7/8"	48	54	50	3	9	800
1/2"	12	17	100	6	18	170	1-7/8"	48	56	50	3	9	1000
5/8"	15	21	100	6	18	250	2"	50	55.5	50	3	9	800
3/4"	19	24	50	5	15	250	2"	50	57	50	3	9	1000
1"	25	29	50	4	12	220	2"	50	60	50	3	9	1400
1"	25	30	50	4	12	350	2-5/16"	58	65	30	2	6	1200
1-1/4"	32	36	50	3	9	400	2-1/2"	64	72	30	2	6	1500
1-1/4"	32	38	50	3	10	500	2-1/2"	64	75	30	2	6	2000
1-1/4"	32	39	50	3	10	600	3"	76	84	30	2	6	1600
1-1/2"	38	42	50	3	9	500	3"	76	87	30	2	6	2500
1-1/2"	38	44	50	3	9	600	3-1/2"	90	102	20	2	6	3000
1-1/2"	38	45	50	3	9	800	4"	102	112	20	2	6	2800
1-3/4"	45	50	50	3	9	600	4"	102	113	20	2	6	3000